


RoughDeck™ HE Hostile Environment Stainless Steel Low-Profile Floor Scale



The 6" stainless steel channels provide superior protection for load cells and cable.


Approvals

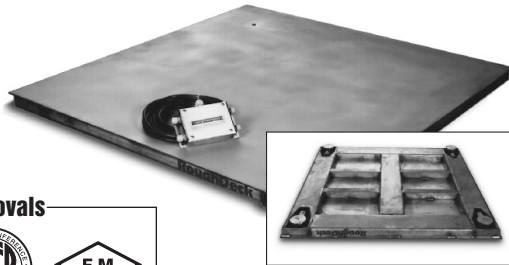

The load cells are recessed within the channel and protected on all sides. SUREFOOT supports provide a superior load introduction surface, reducing extraneous forces which might affect scale accuracy.

Standard Features

- Rugged washdown design
- 304 stainless steel construction
- Smooth stainless steel deck
- Four stainless steel, welded seal IP67, shear beam load cells
- Load cells protected on all four sides
- Rigid 304 stainless steel channel frame
- Remote EL604STA stainless steel NEMA 4X junction box
- Four adjustable stainless steel SUREFOOT support feet
- 20 ft of SURVIVOR® EL147HE hostile environment load cell cable
- Threaded eyebolt holes for easy lifting
- FM-approved load cells



Remote EL604STA stainless steel NEMA 4X junction box with 20 ft of hostile environment load cell cable.

Specifications

APPROVALS:

NTEP - certified, CC# 92-001A9
 Designed to meet or exceed H44,
 5000, 10,000 - Class III 5000d
 2000 - Class III 4000d

END LOAD CAPACITY:

100% full scale at 2000 lb and 5000 lb
 80% full scale at 10000 lb

mV/V OUTPUT:

1.50-1.87 mV/v

CABLE LENGTH:

20 ft (6.1 m)

WARRANTY:

5-year limited warranty

BASES

PART #	SIZE (W x L x H)	CAPACITY	EST. SHIP WT
18680*	2.5' x 2.5' x 3.5"	2000 lb (1000 kg)	173 lb
18681*	3' x 3' x 3.5"	2000 lb (1000 kg)	232 lb
18682	4' x 4' x 3.5"	5000 lb (2500 kg)	375 lb
18683	4' x 4' x 3.5"	10,000 lb (5000 kg)	490 lb
18684	4' x 5' x 3.5"	5000 lb (2500 kg)	437 lb
18685	4' x 5' x 3.5"	10,000 lb (5000 kg)	567 lb
18688	5' x 5' x 3.5"	5000 lb (2500 kg)	541 lb
18689	5' x 5' x 3.5"	10,000 lb (5000 kg)	696 lb
18693	5' x 7' x 3.5"	10,000 lb (5000 kg)	929 lb

* Not recommended for use with pallet jacks.