


## RoughDeck™ HP High-Precision Structural Steel Low-Profile Floor Scale

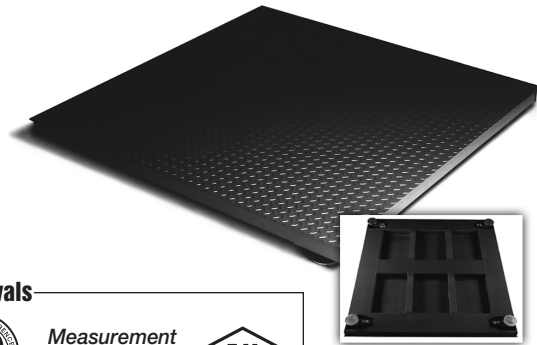

### Standard Features

- Four NTEP - certified alloy steel, welded seal, shear beam load cells
- Unique side-entry "integral" aluminum J-box with quick disconnect
- Five-year limited warranty on all parts
- Heavy-duty industrial design
- Rugged diamond safety treadplate deck
- Rigid structural steel channel frame
- Four adjustable stainless steel SUREFOOT support feet
- Signal trim summing board
- Threaded eyebolt holes for easy lifting
- Four corner overload stops (Canadian versions only)
- Level bubble (Canadian versions only)
- 20 ft SURVIVOR® EL147HE hostile environment load cell cable

### Specifications

#### APPROVALS:

NTEP - certified, CC# 92-001A9  
Class III, 5000d, Measurement Canada  
Approved, AM-4827, HC Series

#### END LOAD CAPACITY:

200% full scale at 1000 lbs  
100% full scale at 2000 lbs, & 5000 lbs  
80% full scale at 10,000 lbs

#### CABLE LENGTH:

20 ft (6.1 m) (for connecting j-box to indicator)

#### mV/V OUTPUT:

1.50-1.87  
mV/V nominal

#### WARRANTY:

5-year limited warranty

#### NTEP APPROVED

PART # w/Quick Connector	PART # w/o Quick Connector	SIZE (W X L X H)	CAPACITY	EST. SHIP WEIGHT
66320†	67693	3' x 3' x 3.5"	1000 lb	232 lb
66319	67694	4' x 4' x 3.5"	1000 lb	375 lb
66318†	67695	2.5' x 2.5' x 3.5"	2000 lb	173 lb
66317†	67696	3' x 3' x 3.5"	2000 lb	232 lb
67618	67697	4' x 4' x 3.5"	2000 lb	375 lb
66316	67698	4' x 4' x 3.5"	5000 lb	375 lb
66315	67699	4' x 4' x 3.5"	10,000 lb	375 lb
66314	67700	4' x 5' x 3.5"	5000 lb	437 lb
66313	67701	4' x 5' x 3.5"	10,000 lb	567 lb
66312	67702	4' x 6' x 3.5"	5000 lb	510 lb
66311	67703	4' x 6' x 3.5"	10,000 lb	656 lb
66310	67704	5' x 5' x 3.5"	5000 lb	541 lb
66309	67705	5' x 5' x 3.5"	10,000 lb	696 lb
66308	67706	5' x 6' x 3.5"	5000 lb	646 lb
66307	67707	5' x 6' x 3.5"	10,000 lb	821 lb
66306	67708	5' x 7' x 3.5"	5000 lb	734 lb
66305	67709	5' x 7' x 3.5"	10,000 lb	929 lb

#### \*CANADIAN WEIGHTS & MEASURES APPROVED

PART # w/Quick Connector	PART # w/o Quick Connector	SIZE (W X L X H)	CAPACITY	EST. SHIP WEIGHT
66464†	67710	3' x 3' x 3.5"	1000 kg	232 lb
66465	67711	4' x 4' x 3.5"	2500 kg	375 lb
66466	67712	4' x 4' x 3.5"	5000 kg	375 lb
66467	67713	5' x 5' x 3.5"	2500 kg	541 lb
66468	67714	5' x 5' x 3.5"	5000 kg	696 lb
66469	67715	5' x 7' x 3.5"	2500 kg	934 lb
66470	67716	5' x 7' x 3.5"	5000 kg	929 lb

† Not recommended for use with pallet jacks

\* Includes four corner overload stops and level bubble.