


DIGI® Summit 3000 Low-Profile Floor Scale

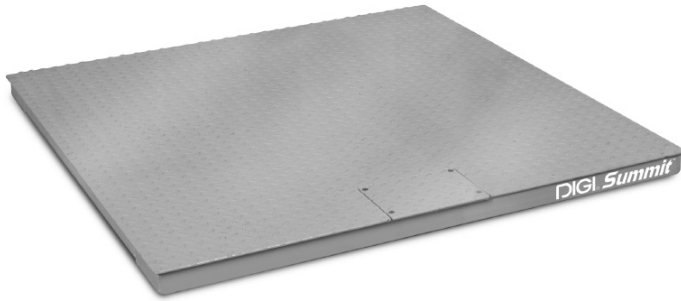


Standard Features

- Four NTEP - certified alloy steel shear beam load cells
- Top access J-box
- Rugged diamond safety treadplate steel deck
- Four adjustable rigid polyurethane rubber feet, 3" (76.2 mm) diameter
- Signal trim summing board housed in ABS enclosure
- Threaded eyebolt hole (1/2-13NC) located in the center of the deck for easy lifting
- 20 ft of EL147 load cell cable

Approvals



Measurement
Canada
Approved
(Pending)



The load cell cable exits the weldment towards the interior of the scale, allowing flexibility to route it out any side of the scale to the digital weight indicator.

Specifications

APPROVALS:

NTEP - certified, CC# 03-014A1;
Measurement Canada pending

END LOAD CAPACITY:

100% full scale at 2000 lb and 5000 lb
80% full scale at 10,000 lb

mV/V OUTPUT:

1.50 – 1.87 mV/V nominal

CABLE LENGTH:

20 ft (6.1 m) (for connecting j-box to indicator)

WARRANTY:

2-year limited warranty

DIGI Summit 3000

PART #	SIZE (W x L x H)	CAPACITY	EST. SHIP WEIGHT
78772	4' x 4' x 3.625"	5000 lb	315 lb
74715	3' x 3' x 3.625"	2000 lb	190 lb
74716	4' x 4' x 3.625"	2000 lb	305 lb
74717	4' x 4' x 3.625"	5000 lb	305 lb
74718	4' x 4' x 3.625"	10,000 lb	305 lb
74719	4' x 5' x 3.625"	5000 lb	395 lb
74720	4' x 5' x 3.625"	10,000 lb	445 lb
74721	4' x 6' x 3.625"	5000 lb	470 lb
74722	4' x 6' x 3.625"	10,000 lb	525 lb
74723	5' x 5' x 3.625"	5000 lb	505 lb
74724	5' x 5' x 3.625"	10,000 lb	575 lb

Access Ramps

74953	3' x 3' x 3.625"	133 lb
74954	4' x 3' x 3.625"	177 lb
74955	5' x 3' x 3.625"	226 lb
74956	3' x 4' x 3.625"	177 lb
74957	4' x 4' x 3.625"	224 lb
74958	5' x 4' x 3.625"	272 lb

Pit Frames

75036	3' x 3'	100 lb
75037	4' x 4'	125 lb
75038	4' x 5'	140 lb
75039	4' x 6'	157 lb
75040	5' x 5'	155 lb

Canadian Weights & Measures*

PART #	SIZE (W x L x H)	CAPACITY	EST. SHIP WEIGHT
77440	3' x 3' x 3.625"	1000 kg	190 lb
77373	4' x 4' x 3.625"	1000 kg	305 lb
77346	4' x 4' x 3.625"	2500 kg	305 lb
77347	4' x 4' x 3.625"	5000 kg	305 lb
82880	4' x 5' x 3.625"	2500 kg	395 lb
82881	4' x 5' x 3.625"	5000 kg	445 lb
82883	4' x 6' x 3.625"	2500 kg	470 lb
82884	4' x 6' x 3.625"	5000 kg	252 lb
77348	5' x 5' x 3.625"	2500 kg	505 lb
77349	5' x 5' x 3.625"	5000 kg	575 lb

* Certification pending